



Category A fabrics



Dark

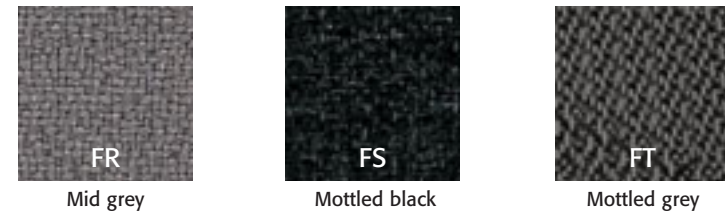

Astrid

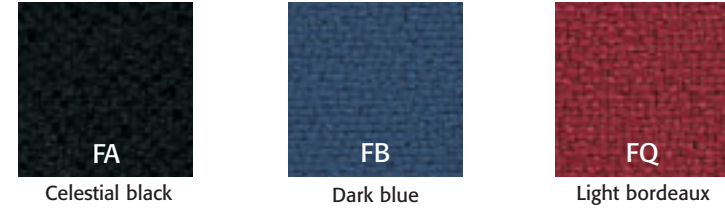


Astrid M

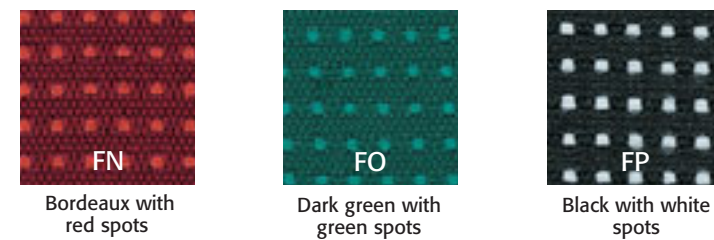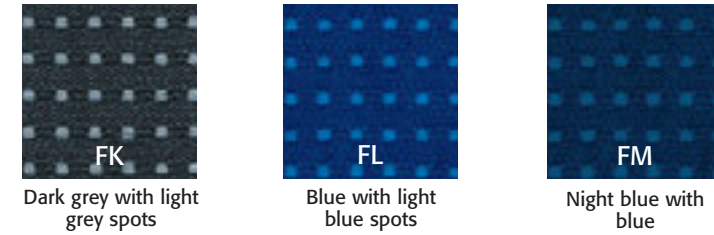

Category B fabrics


King

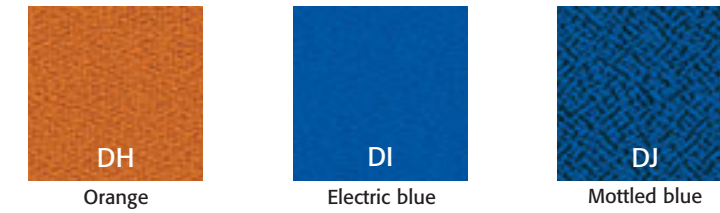

Bisonte



Xtreme plus

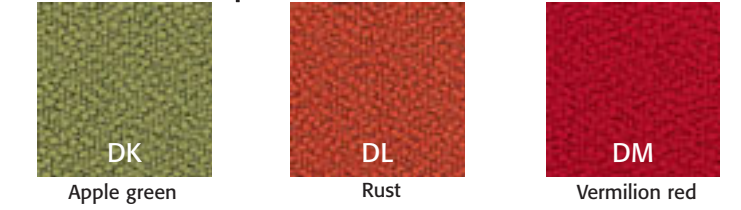

Chair fabric specifications

Range	Composition	Weight	Resistance** to abrasion (no. of revolutions)	Light fastness***	Flammability	Maintenance*
DARK	100% polypropylene	270 gr/m ²	+ 35.000	5	EN 1021-1 cigarette EN 1021-2 match	①
ASTRID	100% polyester	265 gr/m ²	+ 50.000	5	EN 1021-1 cigarette EN 1021-2 match	①
ASTRID M	100% polyester	290 gr/m ²	+ 50.000	5	EN 1021-1 cigarette EN 1021-2 match	①
KING	100% polyester trevera CS	290 gr/m ²	+ 40.000	5	EN 1021-1 cigarette EN 1021-2 match M1 - unflammable	①
BISONTE	64% cotton 36% polyurethane	300 gr/m ²	+ 65.000	5/6	EN 1021-1 cigarette	②
XTREME PLUS	100% polyester Xtreme FR	310 gr/m ²	+ 100.000	6	EN 1021-1 cigarette EN 1021-2 match M1 - unflammable BS 7176 CRIB5	①

Fabric maintenance*

① Vacuum regularly. Clean with a damp sponge or a perchlorethylene solution.

② Soak up stains using an absorbent tissue such as Scottex, then clean with a damp white cloth (soaked in 50% water, 50% alcohol) or with a suitable ammonia-based product.

Resistance to abrasion test**

- Over the course of time, fabrics become worn as a result of friction.
- The Martindale test makes it possible to measure a fabric's resistance to friction.
- During this test, a machine performs a series of revolutions to replicate the effect of friction and calculates the number of revolutions completed before the fabric's thread is broken.

Light fastness test*

- After prolonged exposure to light, fabrics have a tendency to become discoloured.
- Light fastness tests make it possible to measure a colour's resistance to light.
- Light fastness is measured in accordance with UNI standards on a scale of values ranging from 1 (minimum resistance) to 7 (maximum resistance).

Accessories for chairs



Set of castors for use on hard floors
5 castors per set.



Stain repellent spray
350 ml. For lasting protection against stains and dust. Apply only to new or very clean surfaces and re-apply every 6 months.